

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-			

PATENTED FRICTION MODULE DESIGN
 ALLOWS FRICTION PAD CHANGES
 BY HAND WITHOUT TOOLS


MIN BORE DIA: 1.25 (32MM)
 MAX BORE DIA: 2.00 (50MM)
 BORE LC4 FIT TO SUIT (USA)
 BORE H7 FIT TO SUIT (METRIC)
 KEYWAY CLASS 1 FIT (USA)
 DIN 6885 PART 1 (METRIC)

MOUNTING SURFACE

$\frac{3}{4}$ "


1/2-13 UNC
 ANTI ROTATION STUD
 (2) REQ'D

[303]
 $\phi 12$ "

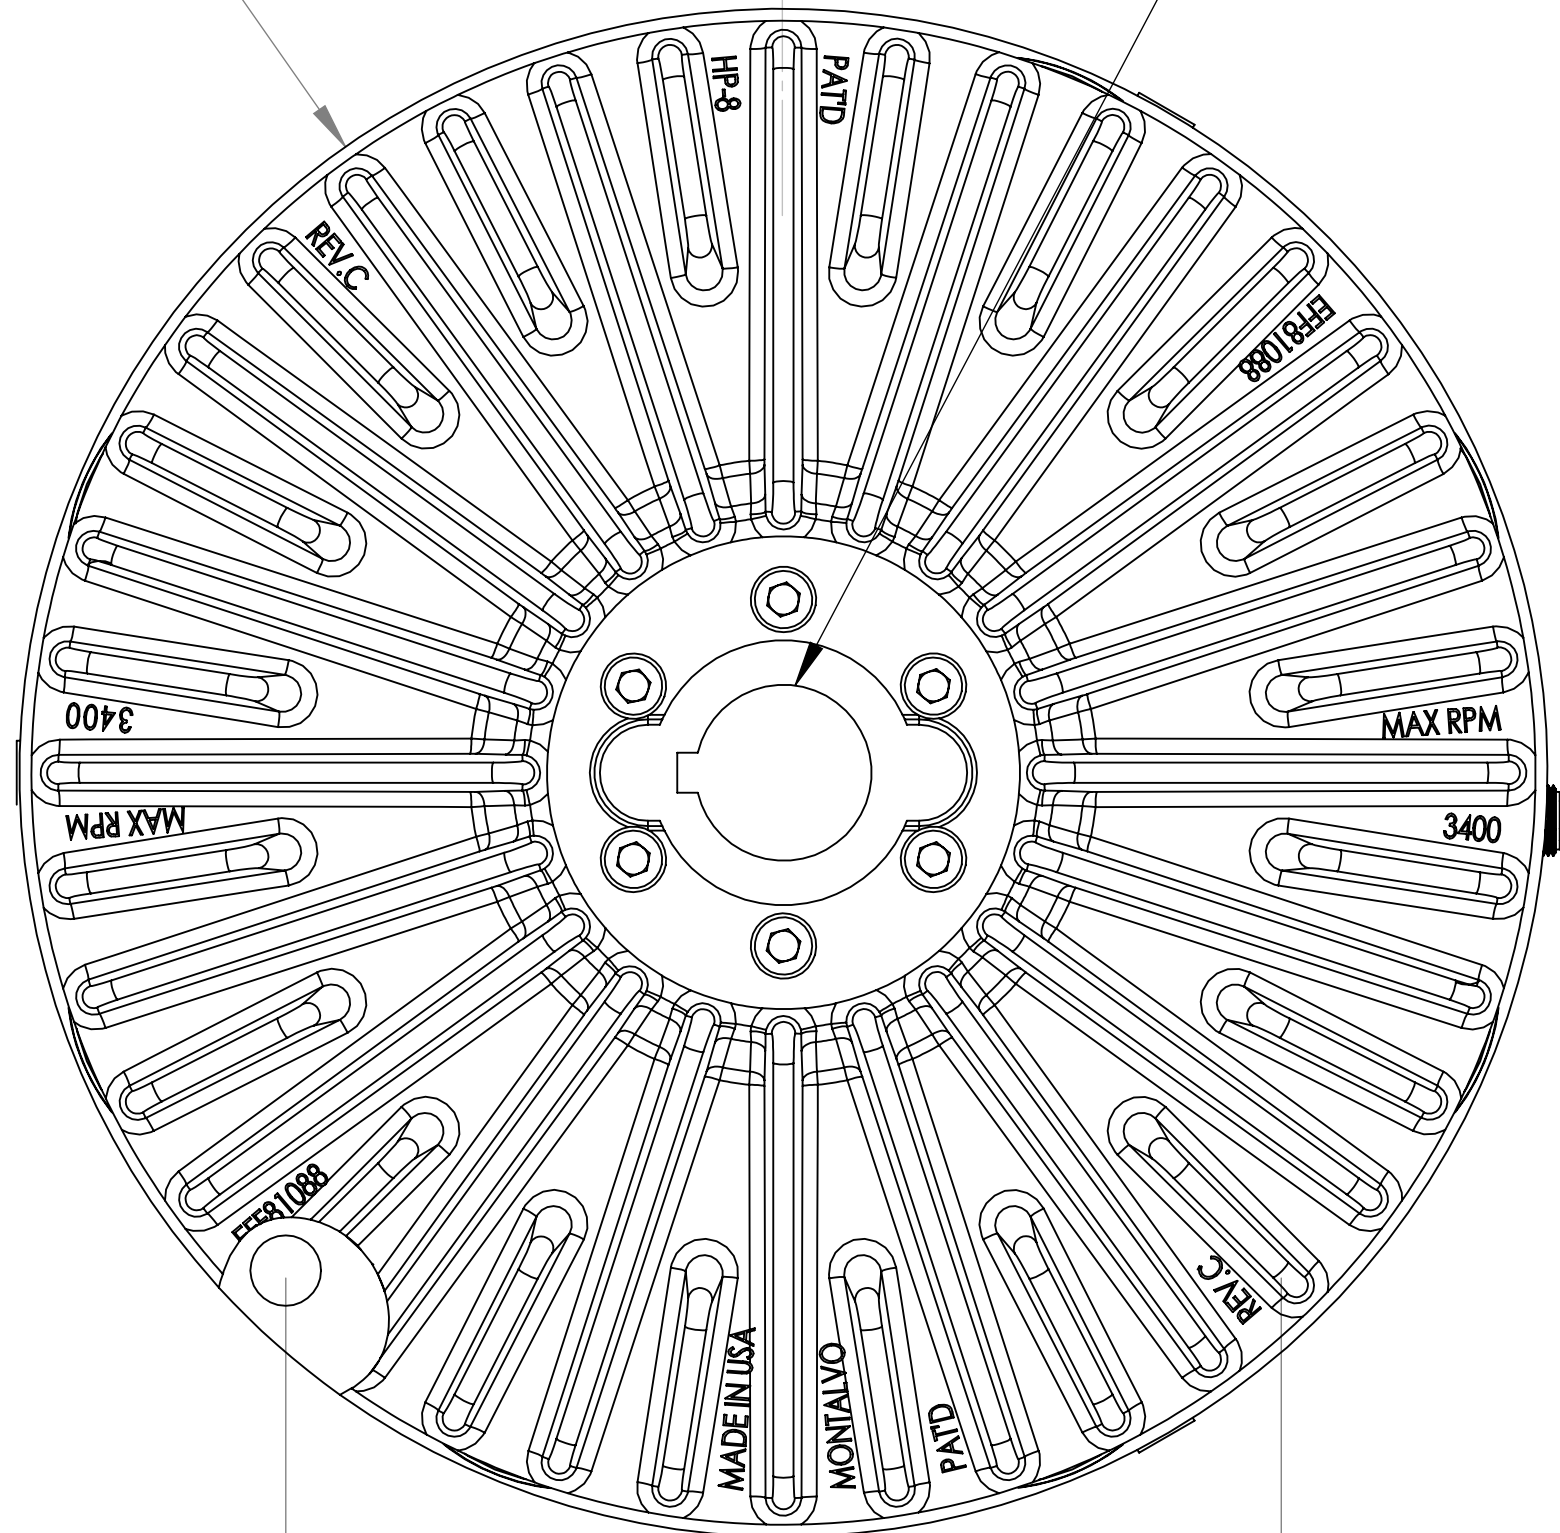

$7 \frac{25}{32}$ "
 13/32 DIA THRU
 TYP (4) PLACES
 SPACER MOUNTING OPTION ONLY

$\phi 12 \frac{5}{32}$ "

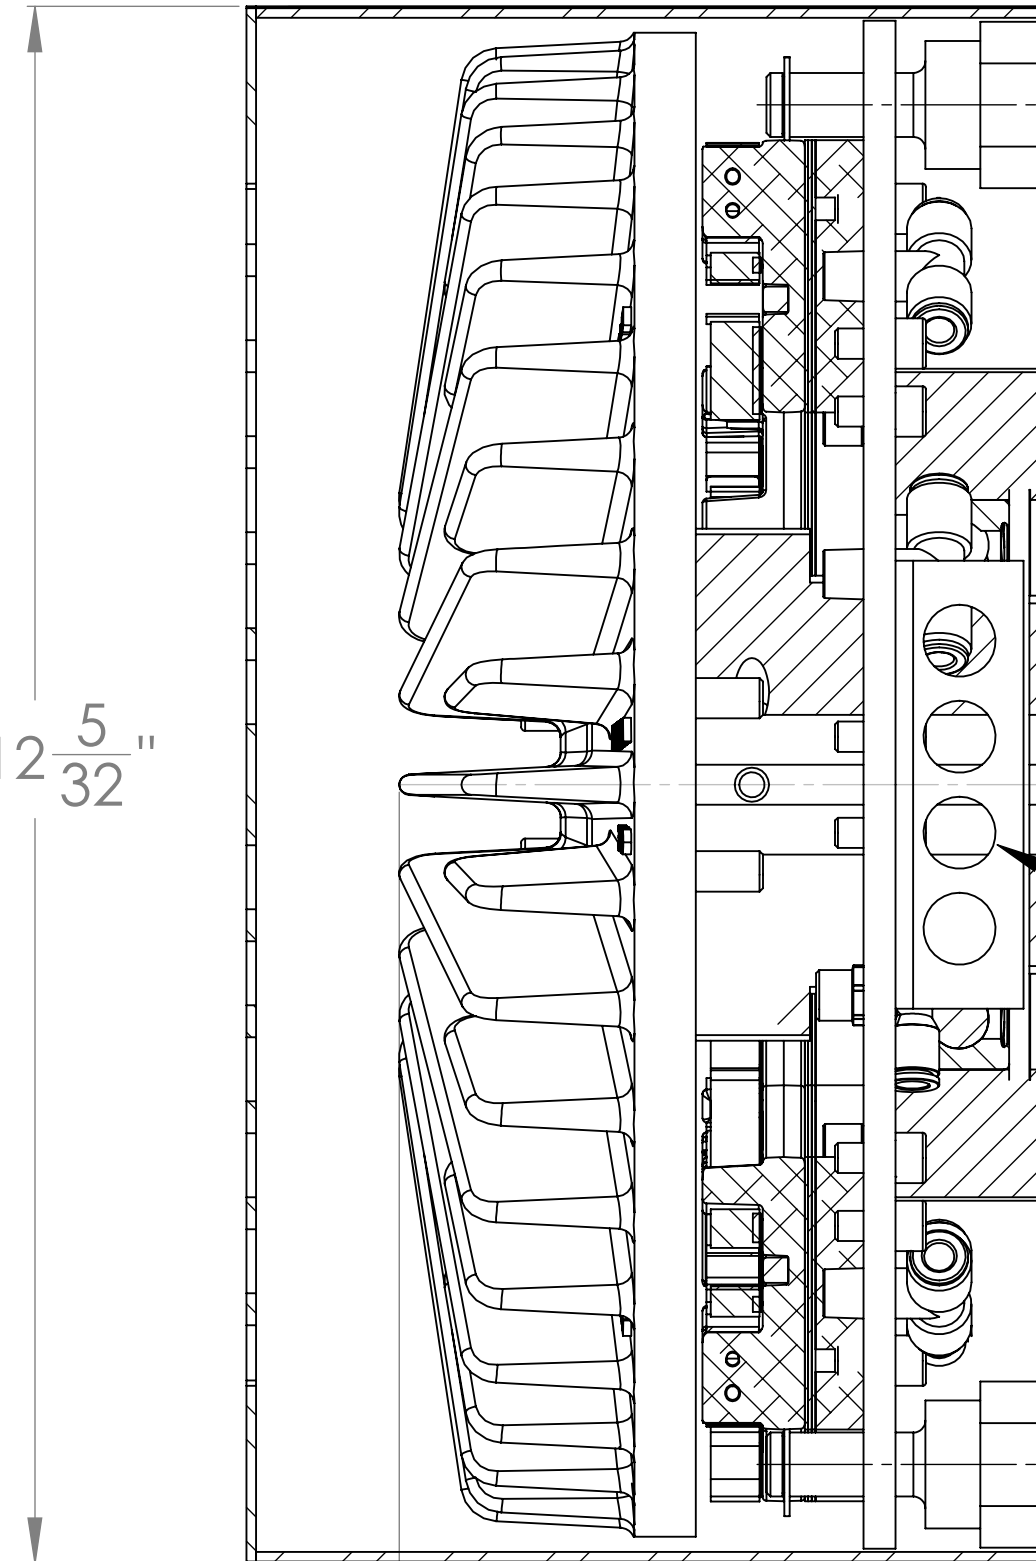

INPUT AIR
 (1) STANDARD
 (4) MAXIMUM

[165]
 $\phi 6.50$

[129]
 $5 \frac{3}{32}$ "

[135]
 $5 \frac{5}{16}$ " TYP

NOTES:
 MINIMUM SHAFT LENGTH: 2.97"

PROPRIETARY AND CONFIDENTIAL
 © THE MONTALVO CORPORATION 2008
 ALL RIGHTS RESERVED. ANY USE OF THIS DRAWING
 OR THE INFORMATION CONTAINED HEREIN, FOR A
 PURPOSE OTHER THAN AS EXPRESSLY AUTHORIZED
 BY THE MONTALVO CORPORATION OR ITS SUBSIDIARY,
 DANAROTA TECHNICAL, IS EXPRESSLY PROHIBITED.

UOS: .00 = ± .01
 UOS: .000 = ± .005
 UOS: .0000 = ± .0005
 UOS: DRAFT ANGLE = 3°
 UOS: ANGULAR: = ± 1/2°
 UOS: FRACTIONAL: = ± 1/64
 UOS: FINISH = AS SHOWN

© 2008 **montalvo**
 Better Web Control®
 The Montalvo Corp. 50 Hutcherson Drive Gorham, ME 04038
 info@montalvo.com 1-800-266-8710

TITLE: V300 BRAKE W/LO PRO CVR CUST PRINT
 DRAWN BY: CAO SIZE: C
 CHK BY: GEL 99002708
 DATE: 6/11/2019 SCALE: NONE
 Dwg No. V300 LO PRO
 REV -
 SHEET 1 OF 5