REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-		-	

PATENTED FRICTION MODULE DESIGN
ALLOWS FRICTION PAD CHANGES
BY HAND WITHOUT TOOLS

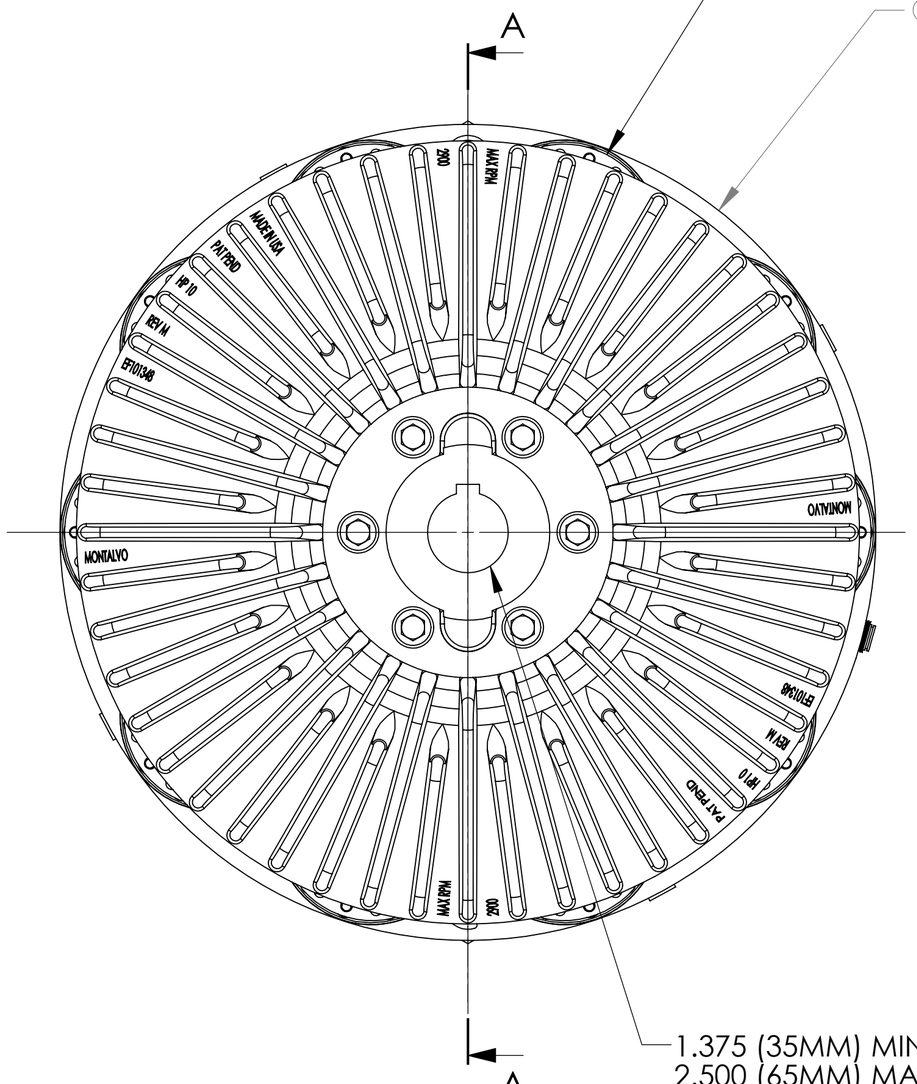

1.375 (35MM) MIN BORE DIA
2.500 (65MM) MAX BORE DIA
BORE LC4 FIT TO SUIT (USA)
BORE H7 FIT TO SUIT (METRIC)
KEYWAY CLASS 1 FIT (USA)
KEYWAY DIN 6885 PART 1 (METRIC)

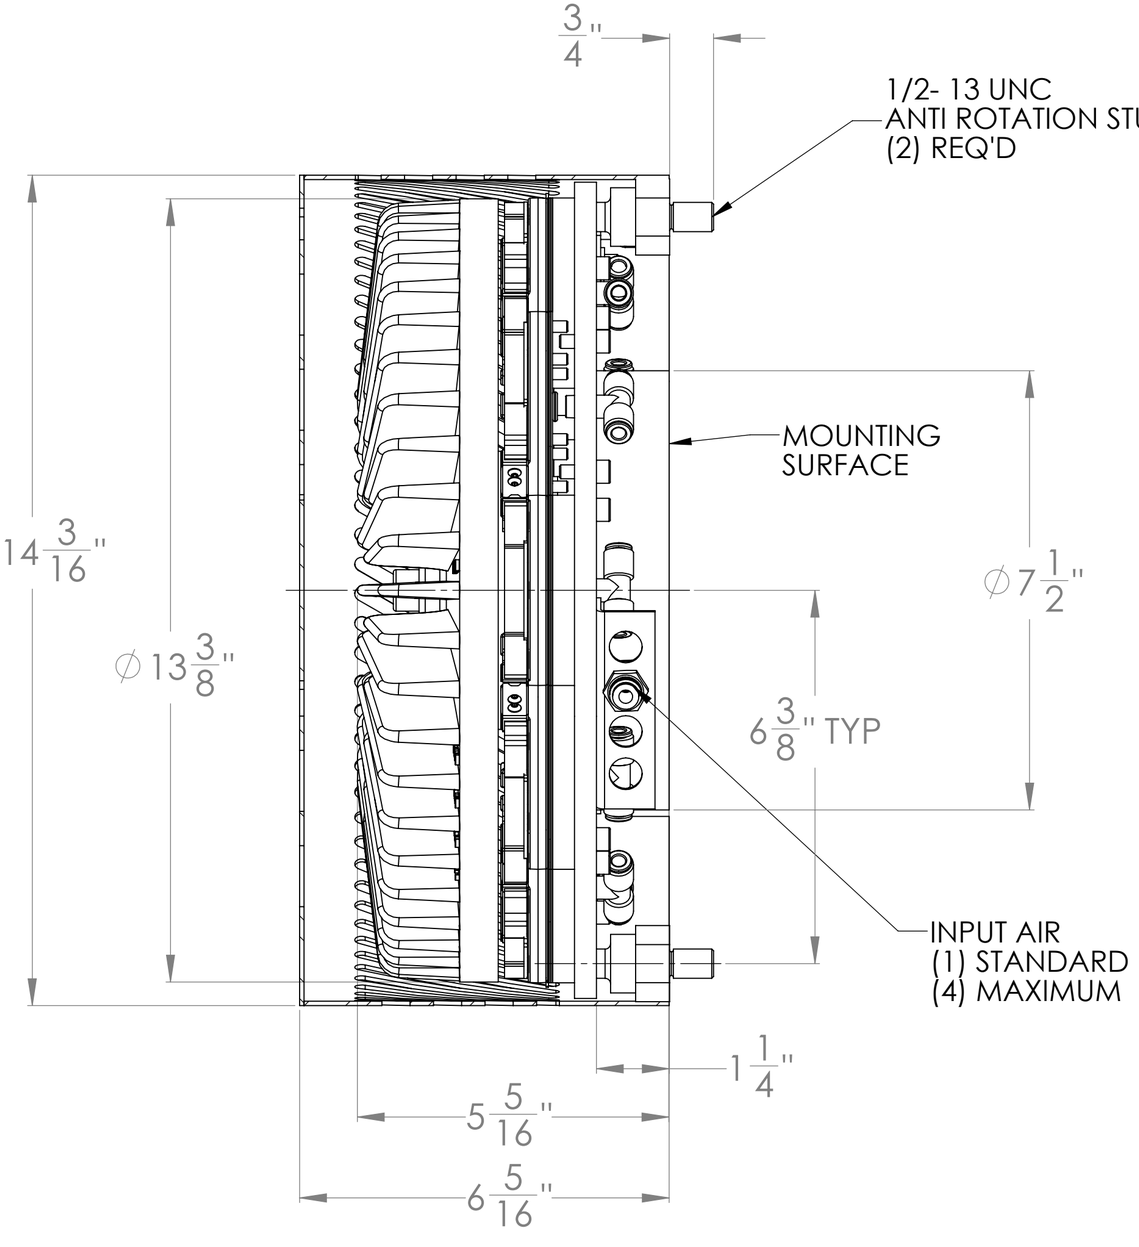

SECTION A-A

MIN SHAFT LENGTH: 3.04" (77MM)

ALL DIMENSIONS INCH
UNLESS OTHERWISE SPECIFIED

METRIC TOLERANCES PER
ISO 2768-f

DEBURR AND BREAK ALL SHARP EDGES

PROPRIETARY AND CONFIDENTIAL

©THE MONTALVO CORPORATION 2010
ALL RIGHTS RESERVED. ANY USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN, FOR A PURPOSE OTHER THAN AS EXPRESSLY AUTHORIZED BY THE MONTALVO CORPORATION OR ITS SUBSIDIARY DANAROTA TECHNIC A/S IS EXPRESSLY PROHIBITED.

UOS: .00 = ± .01
UOS: .000 = ± .005
UOS: .0000 = ± .0005
UOS: DRAFT ANGLE = 3°
UOS: ANGULAR: = ± 1/2°
UOS: FRACTIONAL: = ± 1/64
UOS: FINISH = AS SHOWN

© 2010

montalvo
Better Web Control®

The Montalvo Corp. 50 Hutcherson Drive Gorham, ME 04038
info@montalvo.com 1-800-266-8710

TITLE: V400 BRAKE W/LO PRO CVR CUST PRINT

DRAWN BY: CAO	SIZE	Prt No.	Dwg No.	REV
CHK BY: GEL	C	99002704	99002704	-
DATE: 2/8/2010	SCALE: NONE		SHEET 1 OF 3	